


Replacement Parts for Widespread Deck Faucets



Widespread Deck Faucet Product Installation Guide

Since 1936, Fisher Manufacturing Company has manufactured heavy-duty, high quality plumbing products and hardware specialties for the food service industry. For three generations, the Fisher family has adhered to a strict dedication of and overall value. When you install Fisher products... you install the best. Our hardware is manufactured with the standardization of internal mechanisms. All chrome plating is triple plated copper, nickel and chrome for durability. Every piece of equipment we make is rigorously tested in both our modern in-house testing center and in actual field situations under extreme conditions. Every detail is thoroughly checked. Before we make our products available to you, they pass each and every test. You get proven performance. Guaranteed.

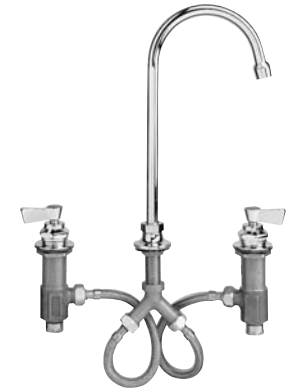

Limited One Year Warranty

Fisher Manufacturing Company warrants its products and parts thereof (except as noted below) against defects in materials or workmanship for a period of one year after the date of original purchase. During this period Fisher Manufacturing Company will replace a defective product or part without charge to you, provided that the entire product is delivered to Fisher Manufacturing Company. All transportation and insurance charges for shipping the product to and from Fisher Manufacturing Company must be borne by you. Charges for transportation and insurance may, at the option of Fisher Manufacturing Company, be refunded depending upon our investigation of the warranty claim. This warranty does not cover external finish (except at date of original purchase) or labor costs not specifically authorized by Fisher Manufacturing Company.

A full and complete copy of our One Year limited warranty is available upon request.

#1902 - Widespread Deck Faucet with 12" Rigid Gooseneck Spout

#1778 - Widespread Deck Faucet with 6" Rigid Gooseneck Spout


KEEP THIS MANUAL FOR FUTURE REFERENCE



ANSI/A112.18.1M, ANSI/NSF 61.9


FISHER MANUFACTURING COMPANY • TOLL FREE: 800-421-6162 FAX: 800-832-8238

www.fisher-mfg.com





2903 SINGLE DECK BASE RIGID

10014 (24")
10022 (36")
SUPPLY LINE
1/2" F X 1/2" F



3969
6" RIGID
GOOSENECK
SPOUT

10049 (24")
10006 (36")
SUPPLY LINE
1/2" M X 1/2" F



3966
12" RIGID
GOOSENECK
SPOUT

34789
SUPPLY LINE ADAPTER




2000-7500
SCREW



2000-8000
RED BUTTON
AND
2000-8001
BLUE BUTTON



2000-2301
LEVER HANDLE



2000-3002
BIBB CAP



10464
DUCK GASKET



2000-5000
WASHER




3000-0000
RH SWIVEL STEM
REPAIR KIT
OR
3000-0001
LH SWIVEL STEM
REPAIR KIT

3000-0011
RH SWIVEL STEM



2000-5003
SEAT WASHER




1000-7502
SCREW




10456
LUBE



1792
ANGLE STOP
WITH KEY





1790-1
ANGLE STOP
W/ CROSS
HANDLE




17396
SUPPLY LINE



1000-8002
SLIP JOINT KIT



HOT SIDE
1770-0007 DECK SHUT
OFF VALVE LEFT HAND
SWIVEL STEM



COLD SIDE
1770-0006 DECK SHUT
OFF VALVE LEFT HAND
SWIVEL STEM

FISHER
MANUFACTURING COMPANY
PO BOX 60, TULARE, CA 93275
(800)421-6162, FAX: (800)832-8238
www.fisher-mfg.com

Installation Instructions for Widespread Deck Faucets

BE SURE TO CHECK WITH YOUR LOCAL DEPARTMENT HAVING JURISDICTION REGARDING BACKFLOW PREVENTION

Installation Notes:

- Be sure to shut off water supply before beginning.
- Use pipe thread sealant such as PST on all threaded joints.
- Check the packaging for missing items BEFORE beginning installation. If items are missing, contact your supplier.


Tools Required for Installation

- Pipe Wrench
- Medium Sized Crescent Wrench
- Pipe Thread Sealant



Package Contents

The box should contain the following:

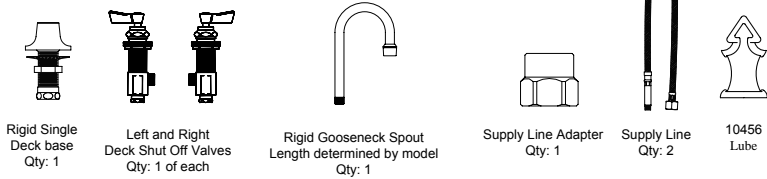


Installation Instructions

1. Cut rough-in holes.
2. Mount spout base, then tighten with washer and locknut.
3. Screw on supply line adapter, use pipe sealant on the connection, to the nipple.
4. Add a small amount of o-ring lube to the o-ring on the supply lines and tighten supply lines in the supply line adapter.
5. Mount both control valves, and tighten with locknut. Connect supply lines to control valves and tighten. Make sure supply lines are not kinked or crimped after install.
6. Apply thread sealant to male threads on the spout and insert into control valve. Tighten until secure.
7. Turn on water supply and check for leaks.


Step 1

ROUGH-IN:

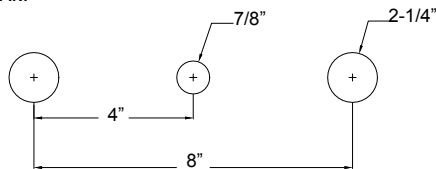


Installation Instructions Continued


Step 2




Step 3

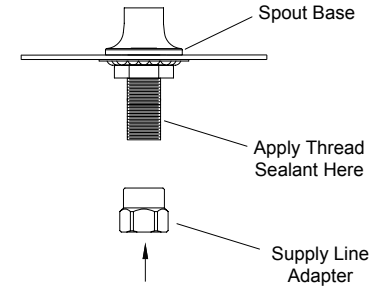


Step 4



Step 5

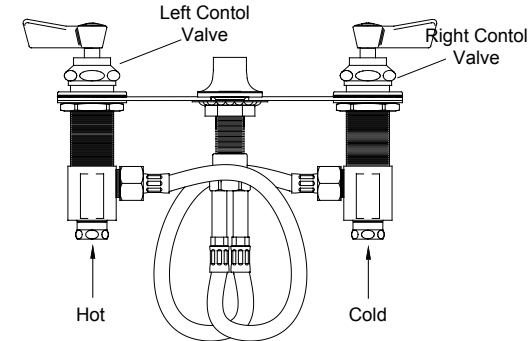

Step 6

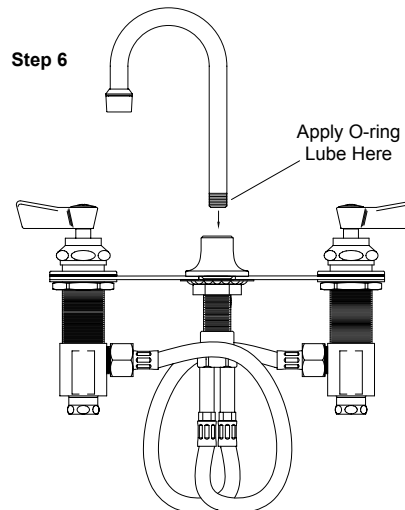

Step 7

