


Replacement Parts for Single Wall Faucets



Single Wall Faucet Product Installation Guide

Since 1936, Fisher Manufacturing Company has manufactured heavy-duty, high quality plumbing products and hardware specialties for the food service industry. For three generations, the Fisher family has adhered to a strict dedication of and overall value. When you install Fisher products... you install the best. Our hardware is manufactured with the standardization of internal mechanisms. All chrome plating is triple plated copper, nickel and chrome for durability. Every piece of equipment we make is rigorously tested in both our modern in-house testing center and in actual field situations under extreme conditions. Every detail is thoroughly checked. Before we make our products available to you, they pass each and every test. You get proven performance. Guaranteed.

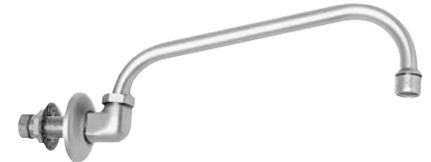

Limited One Year Warranty

Fisher Manufacturing Company warrants its products and parts thereof (except as noted below) against defects in materials or workmanship for a period of one year after the date of original purchase. During this period Fisher Manufacturing Company will replace a defective product or part without charge to you, provided that the entire product is delivered to Fisher Manufacturing Company. All transportation and insurance charges for shipping the product to and from Fisher Manufacturing Company must be borne by you. Charges for transportation and insurance may, at the option of Fisher Manufacturing Company, be refunded depending upon our investigation of the warranty claim. This warranty does not cover external finish (except at date of original purchase) or labor costs not specifically authorized by Fisher Manufacturing Company.

A full and complete copy of our One Year limited warranty is available upon request.

WARNING:


Proposition 65 requires that we provide you with the following notice: "This product Contains A Chemical Known To The State Of California To Cause Birth Defects Or Other Reproductive Harm."

KEEP THIS MANUAL FOR FUTURE REFERENCE




ANSI/A112.18.1M, ANSI/NSF 61.9

FISHER MANUFACTURING COMPANY - TOLL FREE: 800-421-6162 FAX: 800-832-8238



3967
16" SWING SPOUT

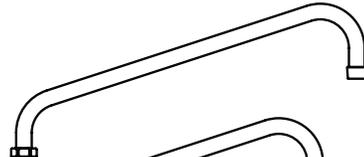

3964
14" SWING SPOUT



3963
12" SWING SPOUT




3962
10" SWING SPOUT




3961
8" SWING SPOUT





3960
6" SWING SPOUT




10014 (24")
10022 (36")
SUPPLY LINE
1/2" F X 1/2" F



10049 (24")
10006 (36")
SUPPLY LINE
1/2" M X 1/2" F



#3000-0003
DOUBLE JOINT SPOUT
OR
#4000-0002
DOUBLE JOINT SPOUT



12564
2.2 GPM
AERATOR

15621
SPOUT NUT



2002
SNAP RING




1600-5000
SPOUT
O-RINGS



10456
LUBE




19119
SWIVEL SPOUT
RETRO-FIT KIT



2200-0000
SLIP JOINT KIT


1790-1
ANGLE STOP
W/ CROSS
HANDLE



1792
ANGLE STOP
WITH KEY



2400-2103
ELBOWS



FISHER
MANUFACTURING COMPANY
PO BOX 60, TULARE, CA 93275
(800)421-6162, FAX: (800)832-8238
www.fisher-mfg.com

Installation Instructions for Single Wall Faucets

BE SURE TO CHECK WITH YOUR LOCAL DEPARTMENT HAVING JURISDICTION REGARDING BACKFLOW PREVENTION

Installation Notes:

- Be sure to shut off water supply before beginning.
- Use pipe thread sealant such as PST on all threaded joints.
- Check the packaging for missing items BEFORE beginning installation. If items are missing, contact your supplier.


Tools Required for Installation

- Medium Sized Crescent Wrench
- Pipe Thread Sealant




Package Contents


The box should contain the following:



Single Backsplash Swivel Base
Qty: 1



1000-8002 Slip Joint Kit
Qty: 1



Swivel Swing Spout
Length determined by model
Qty: 1
Swivel spout includes one 2002 snap ring and two 1600-5000 o-rings




10456 Lube

Installation Instructions


1. After unpacking items and checking for missing components, mount single backsplash base to the backsplash, using the slip joint kit to tighten. Attach elbow or supply line (not included), if required. Be sure to use pipe thread sealant on the nipple threads.
2. Optional DJ swivel spout, apply lube to the o-ring on the spout. Mount the DJ swivel spout and tighten the nut onto the faucet spout outlet.
3. Installing a swivel spout, apply lube to the o-rings on the swing spout. Make sure the white snap ring is in place before mounting the spout. Mount the spout and tighten the swing spout nut onto the faucet spout outlet.
4. Turn on water supply and check for leaks.

Step 1

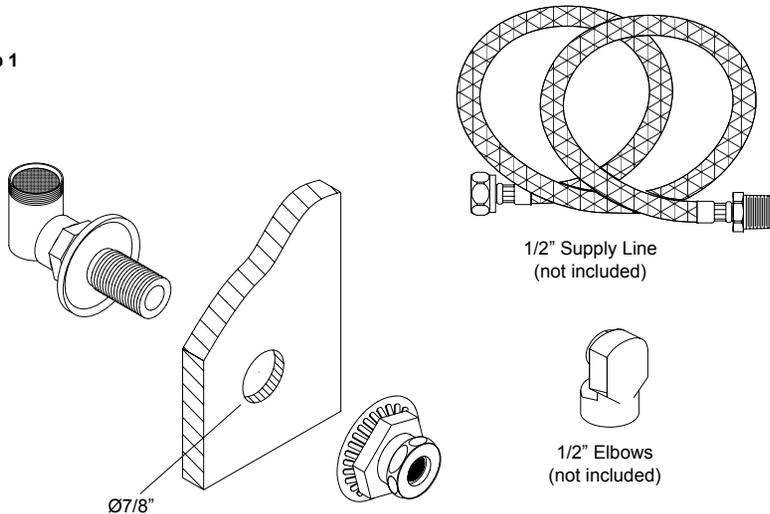


Installation Instructions Continued

Step 2

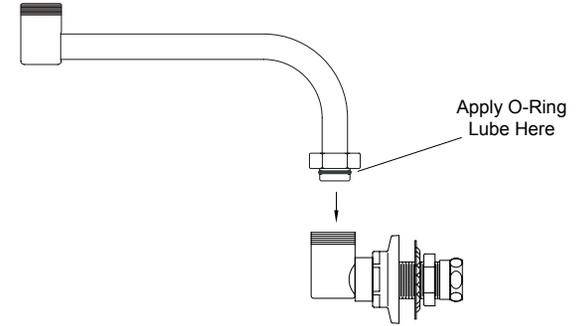

Step 3

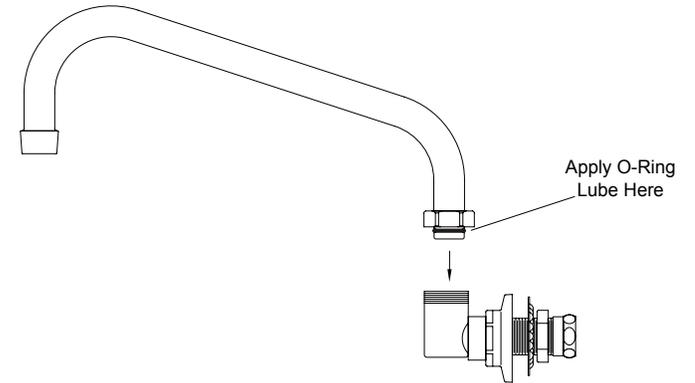

Step 4

