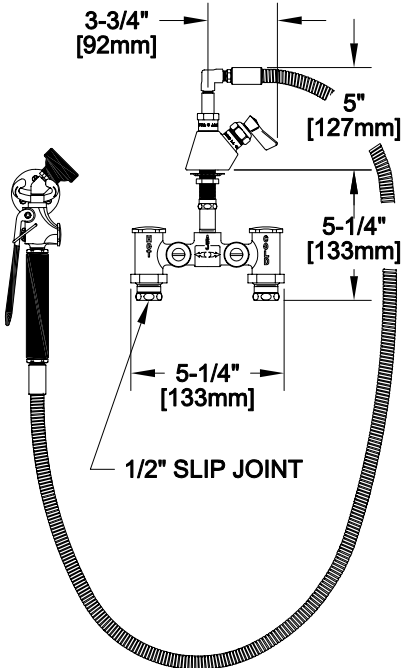




APPLICATION:		PRODUCT NAME: UTILITY SPRAY DECK MOUNT	
JOB NAME:		<input type="checkbox"/> SPECIAL CONFIGURATION <input type="checkbox"/> CHECK BASE MODEL AND OPTIONS	
QUANTITY:	ITEM NO.	MODEL: ■ 2070	
 <p>ROUGH-IN:</p> 		OPTIONS OR MODIFICATIONS: <input type="checkbox"/> SUPPLY LINES (24" OR 36") CIRCLE LENGTH <input type="checkbox"/> ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE <input type="checkbox"/> IN-LINE DUAL CHECK VALVE <input type="checkbox"/> PIPE HOOK <input type="checkbox"/> BRUSH <input type="checkbox"/> HANDLES (CROSS OR WRIST) CIRCLE STYLE <input type="checkbox"/> VANDAL RESISTANT KIT <input type="checkbox"/> OTHER _____	
		FEATURES <b>CONTROL VALVE</b> * SINGLE DECK CONTROL * TEMPERATURE CONTROL VALVE WITH INTERNAL SPRING LOADED CHECK VALVES * STEM - LEFT HAND * SWIVELLING SEAT DISKS * HOT AND COLD INDEX BUTTONS * STAINLESS STEEL SEATS * STAINLESS STEEL SEAT SCREWS * STAINLESS STEEL HANDLE SCREWS <b>HOSE</b> * 60" LENGTH * STAINLESS STEEL END FITTINGS * STAINLESS STEEL EXTERNAL JACKET * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE * REPAIRABLE IN-FIELD WITH SIMPLE TOOLS <b>UTILITY SPRAY VALVE</b> * NOZZLE THREADED INTO VALVE * SHOWER SPRAY PATTERN * 45° ANGLED HEAD * BRONZE HANDLE - NOT PLASTIC - MEANS FULL "ON" * FITS ALL BRANDS * 2.65 GPM AT 80 PSI <b>SWIVEL ELBOW</b> * 360° TURNING RADIUS <b>SYSTEM LIMITS</b> * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE: 200 PSI MAX. STATIC <b>SHIPPING WEIGHT</b> * 6.0 LBS	
 FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com			