
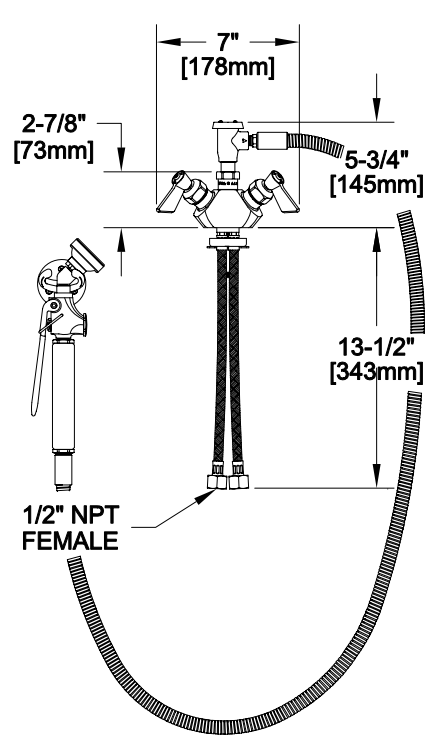




| | | | |
|---|----------|--|--|
| APPLICATION: | | PRODUCT NAME: UTILITY SPRAY DECK MOUNT | |
| JOB NAME: | | <input type="checkbox"/> SPECIAL CONFIGURATION <input type="checkbox"/> CHECK BASE MODEL AND OPTIONS | |
| QUANTITY: | ITEM NO. | MODEL: ■ 2160 | |
|  <p>ROUGH-IN:</p>  | | OPTIONS OR MODIFICATIONS: <input type="checkbox"/> SUPPLY LINES (24" OR 36") CIRCLE LENGTH <input type="checkbox"/> ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE <input type="checkbox"/> IN-LINE DUAL CHECK VALVE <input type="checkbox"/> PIPE HOOK <input type="checkbox"/> BRUSH <input type="checkbox"/> HANDLES (CROSS OR WRIST) CIRCLE STYLE <input type="checkbox"/> VANDAL RESISTANT KIT <input type="checkbox"/> OTHER _____ | |
| | | FEATURES CONTROL VALVE * SINGLE DECK DUAL CONTROL * HOT SIDE STEM - RIGHT HAND * COLD SIDE STEM - LEFT HAND * SWIVELLING SEAT DISKS * HOT AND COLD INDEX BUTTONS * STAINLESS STEEL SEATS * STAINLESS STEEL SEAT SCREWS * STAINLESS STEEL HANDLE SCREWS * FLEXIBLE INLET HOSES HOSE * 60" LENGTH * STAINLESS STEEL END FITTINGS * STAINLESS STEEL EXTERNAL JACKET * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE * REPAIRABLE IN-FIELD WITH SIMPLE TOOLS UTILITY SPRAY VALVE * NOZZLE THREADED INTO VALVE * SHOWER SPRAY PATTERN * 45° ANGLED HEAD * BRONZE HANDLE - NOT PLASTIC - MEANS FULL "ON" * FITS ALL BRANDS * 2.65 GPM AT 80 PSI SWIVEL ELBOW * 360° TURNING RADIUS * ATMOSPHERIC VACUUM BREAKER SYSTEM LIMITS * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE: 200 PSI MAX. STATIC SHIPPING WEIGHT * 8.0 LBS | |
|  ANSI/A112.18.1M | |  FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com | |