


APPLICATION:	
JOB NAME:	
QUANTITY:	ITEM NO.:

PRODUCT NAME: WALL ADJ. POT FILLER W/VAC. BREAKER
<input type="checkbox"/> SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS

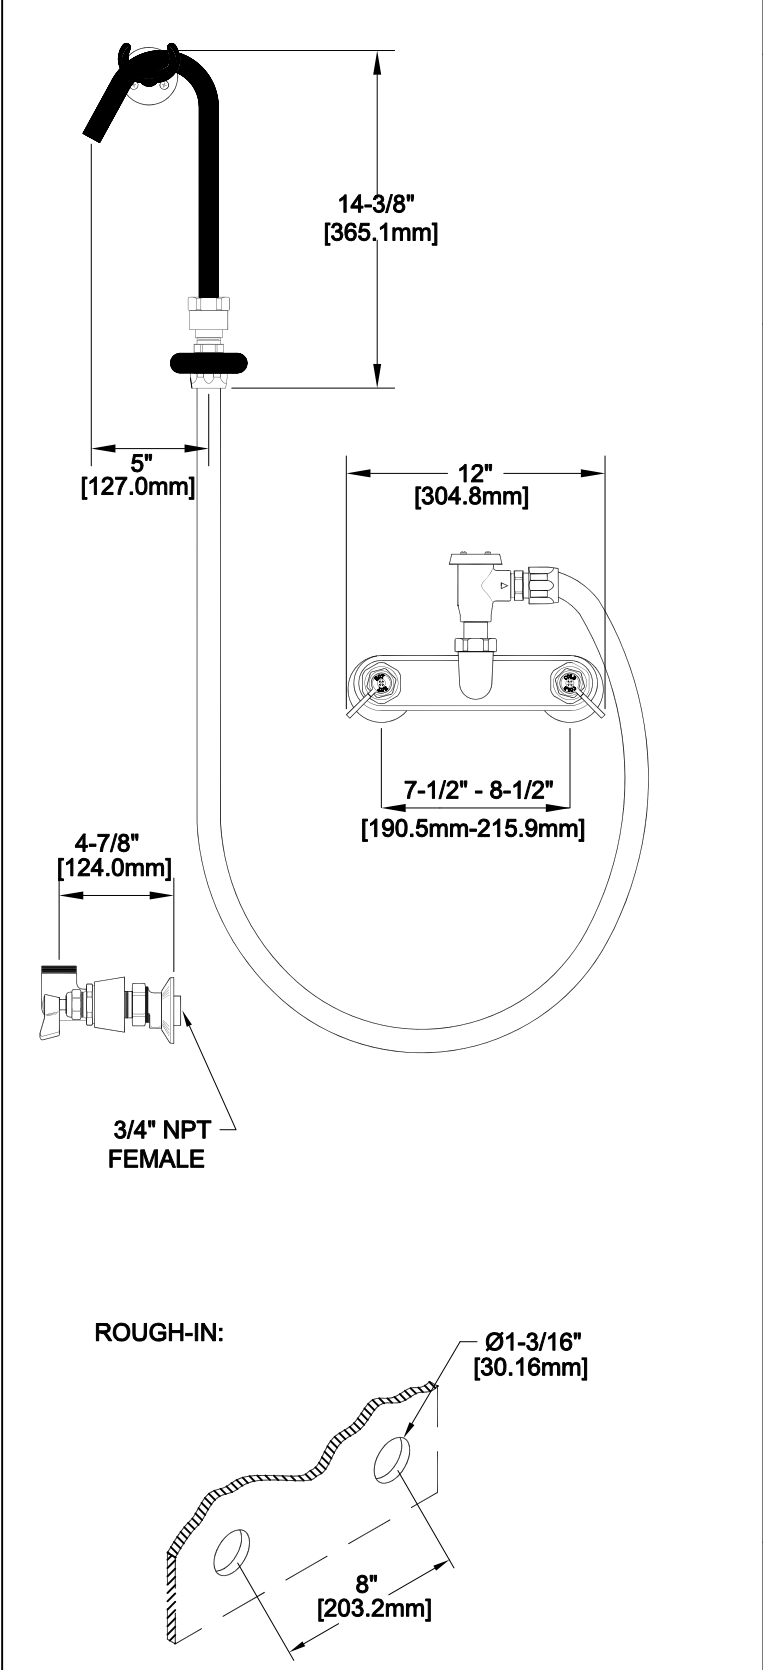

MODEL: <input type="checkbox"/> 5240
OPTIONS OR MODIFICATIONS: <input type="checkbox"/> SUPPLY LINES (24" OR 36") CIRCLE LENGTH <input type="checkbox"/> NIPPLES <input type="checkbox"/> ELBOWS <input type="checkbox"/> HANDLES (CROSS OR WRIST) CIRCLE STYLE <input type="checkbox"/> VANDAL RESISTANT KIT <input type="checkbox"/> OTHER _____

- FEATURES:**
- * SWIVEL OUTLET
 - * ECCENTRICS ADJUST FROM 7-1/2" TO 8-1/2"
 - * SWIVELLING SEAT DISKS
 - * HOT SIDE STEM - RIGHT HAND, COLD - LEFT HAND
 - * STAINLESS STEEL SEATS
 - * STAINLESS STEEL SEAT SCREWS
 - * STAINLESS STEEL HANDLE SCREWS
- HOSE**
- * 72" LG. HEAT MASTER FDA NITRILE/ARAMID
 - * NSF-51 (100 PSI W.P. @ 300°F) CONSTANT
 - * RENEWABLE END FITTINGS & BUMPER
 - * INLET - 360° SWIVEL VACUUM BREAKER
 - * OUTLET - 360° SWIVEL SPOUT W/VINYL FINISH
 - * 360° SWIVEL GOOSENECK
 - * NONMARRING GOOSENECK
 - * 360° SWIVEL ATMOSPHERIC VACUUM BREAKER
- RECOMMENDED SETTINGS**
- * 110°F AT 80 PSI
- SYSTEM LIMITS**
- * TEMP: 40°F MIN. TO 140°F MAX.
 - * PRESSURE 200 PSI MAX. STATIC
 - * 37 GPM @ 80 PSI
- SHIPPING WEIGHT**
- * 11.0 LBS

ANSI/A112.18.1M

FISHER
 FISHER MANUFACTURING COMPANY
 TOLL FREE: 800-421-6162 - FAX: 800-832-8238
 information@fisher-mfg.com - www.fisher-mfg.com