



**FOOTPRINT:**

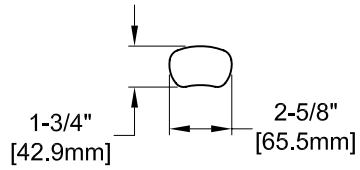

**ROUGH-IN:**



**PRODUCT NAME:** STAINLESS STEEL  
SINGLE DECK DUAL CONTROL PRE-RINSE  
WITH ADD-ON

**MODEL:**

- 53015 6" SWING SPOUT W/ LEVER HANDLES
- 53023 8" SWING SPOUT W/ LEVER HANDLES
- 53031 10" SWING SPOUT W/ LEVER HANDLES
- 53058 12" SWING SPOUT W/ LEVER HANDLES
- 53066 14" SWING SPOUT W/ LEVER HANDLES
- 53074 16" SWING SPOUT W/ LEVER HANDLES
- 76171 6" SWING SPOUT W/ WRIST HANDLES
- 76198 8" SWING SPOUT W/ WRIST HANDLES
- 76201 10" SWING SPOUT W/ WRIST HANDLES
- 76228 12" SWING SPOUT W/ WRIST HANDLES
- 76236 14" SWING SPOUT W/ WRIST HANDLES
- 76244 16" SWING SPOUT W/ WRIST HANDLES

**FEATURES:**

**MAIN CONTROL VALVE**

- \* SINGLE DECK DUAL CONTROL
- \* INTERNAL SPRING LOADED CHECK VALVES
- \* SWIVELLING SEAT DISKS
- \* HOT SIDE STEM - RIGHT HAND CHECK
- \* COLD SIDE STEM - LEFT HAND CHECK
- \* STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS

**ADD-ON CONTROL VALVE**

- \* STEM - RIGHT HAND SWIVEL
- \* HOT INDEX BUTTON
- \* SWIVELLING SEAT DISKS
- \* STAINLESS STEEL SEATS, SEAT SCREWS AND HANDLE SCREWS.

**HOSE**

- \* 36" LENGTH
- \* STAINLESS STEEL END FITTINGS
- \* STAINLESS STEEL EXTERNAL JACKET
- \* 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE
- \* REPAIRABLE IN FIELD WITH SIMPLE TOOLS

**ULTRA SPRAY VALVE**

- \* LOWEST ENERGY USER - 1.15 GPM @ 60 PSI
- \* CLEANS FASTER - TEST PROVEN
- \* ENGINEERED TO LAST - NO 'O' RINGS TO LEAK
- \* INTERCHANGEABLE - FITS ALL BRANDS

**WALL BRACKET**

- \* ADJUSTS FROM 2" TO 12"

**SYSTEM LIMITS**

- \* TEMP: 40°F MIN. TO 140°F MAX. STATIC
- \* PRESSURE 200 PSI MAX. STATIC
- \* SHIPPING WEIGHT: 15.0 LBS

\* NSF 61-9 APPROVED & LISTED  
[www.truedail.com](http://www.truedail.com)



FISHER MANUFACTURING COMPANY  
TOLL FREE: 800-421-6162 - FAX: 800-832-8238  
[information@fisher-mfg.com](mailto:information@fisher-mfg.com) - [www.fisher-mfg.com](http://www.fisher-mfg.com)