

APPLICATION:	
JOB NAME:	
QUANTITY:	ITEM NO.



MODEL	DIM "A"	DIM "B"	DIM "C"
13307	8-1/4"	12-1/4"	5-1/2"
	[209.6mm]	[311.2mm]	[139.7mm]
13293	4-1/2"	8-1/8"	3-1/2"
	[114.3mm]	[206.4mm]	[88.90mm]

ROUGH-IN:

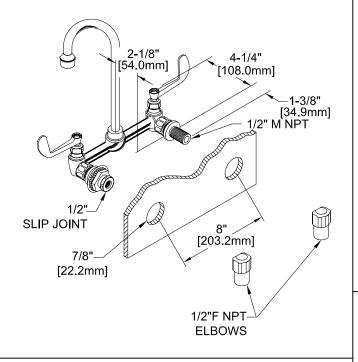

ANSI/A112.18.1M

(11)

PRODUCT NAME:

8" C/C BACKSPLASH FAUCET W/ RIGID GOOSENECK SPOUT <u>SPEC. 91693 REV.</u>

SPECIAL CONFIGURATION

■ 91693 CHECK BASE MODEL AND OPTIONS

MODEL:

■ 13307 W/ 12 RIGID GOOSENECK SPOUT
□ 13293 W/ 6" RIGID GOOSENECK SPOUT

OPTIONS OR MODIFICATIONS:

☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH

■ ELBOWS

□ VANDAL RESISTANT KIT

■ HANDLES (CROSS OR WRIST) CIRCLE STYLE

☐ OTHER

FEATURES:

* 8" C/C BACKSPLASH FAUCET

* SWIVELLING SEAT DISKS

* HOT SIDE STEM - RIGHT HAND

* COLD SIDE STEM - LEFT HAND

* STAINLESS STEEL SEATS

* STAINLESS STEEL SEAT SCREWS

* STAINLESS STEEL HANDLE SCREWS

SYSTEM LIMITS

* TEMP: 40°F MIN. TO 140°F MAX.

* PRESSURE 200 PSI MAX. STATIC

* 2.20 GPM AT 80 PSI

SHIPPING WEIGHT

* 5.0 LBS



TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com