
APPLICATION:	
JOB NAME:	
QUANTITY:	ITEM NO.

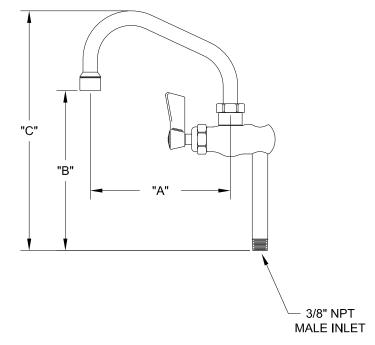

MODEL	DIM "A"	DIM "B"	DIM "C"
71323	6"	7-1/8"	10 - 3/4"
	[152mm]	[181mm]	[273mm]
71331	8"	8"	11-5/8"
	[204mm]	[204mm]	[296mm]
71358	10"	7-1/2"	11"
	[254mm]	[191mm]	[280mm]
71366	12"	8-3/4	12-3/8"
	[305mm]	[222mm]	[314mm]
71374	14"	9-3/8"	13"
	[356mm]	[239mm]	[330mm]
71382	16"	10"	13-5/8"
	[406mm]	[255mm]	[347mm]

D	0	$^{\sim}$	П	ı	C	ГΙ	NI	Λ	N	ı⊏	
	$\overline{}$	u	ப	u			N	м	IV		. =

STAINLESS STEEL ADD-ON FAUCET WITH SWING SPOUT

MODEL:

	71323	WITH 6" SWING SPOUT
	71331	WITH 8" SWING SPOUT
	71358	WITH 10" SWING SPOUT
	71366	WITH 12" SWING SPOUT
	71374	WITH 14" SWING SPOUT
	71382	WITH 16" SWING SPOUT

SPEC. CAHS-ADR4KF-XXL

FEATURES

CONTROL VALVE

- * 3/8" MALE INLET
- * STEM RIGHT HAND
- * HOT AND COLD INDEX BUTTONS
- * SWIVELLING SEAT DISK
- * STAINLESS STEEL SEAT
- * STAINLESS STEEL SEAT SCREW
- * STAINLESS STEEL HANDLE SCREW

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE: 200 PSI MAX. STATIC
- * 2.20 GPM AT 80 PSI

SHIPPING WEIGHT

- * 2.5 LBS
- * NSF 61-9 APPROVED & LISTED www.truesdail.com



TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com